HARDWOOD FOREST DIVISION

# Standard Operating Procedure



# Monitoring Bait Station Specifications




## Components;


1) 50mm drain/vent PVC Pipe- 6m section will do around 40 stations @150mm cuts. Can also buy 3m sections for c. \$20

Document title: HFD SOP –CIFOA Monitoring; Bait Station Specifications		Version No.: 1	Page: Page 1 of 4
Document ID: D22/12294	Document Owner:	Issue date: Sept 2022	Review date: Sept 2027




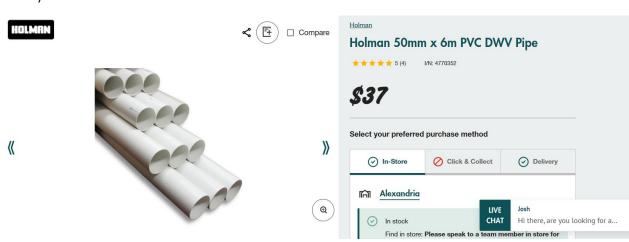


3) 50mm insect proof vent cowl- Caps with insect mesh can help keep flys and maggots out however soon get chewed up by larger animals anyway. Non mesh variations are half the price

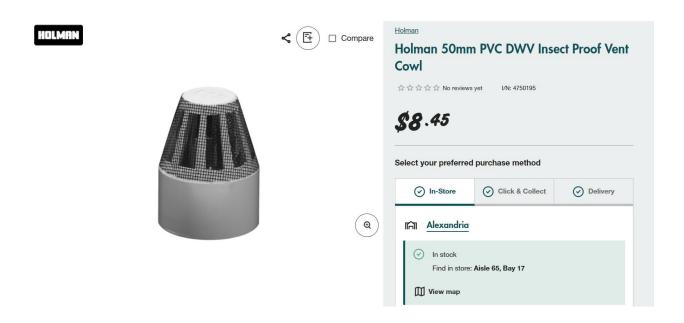


## 4) 50mm push on cap

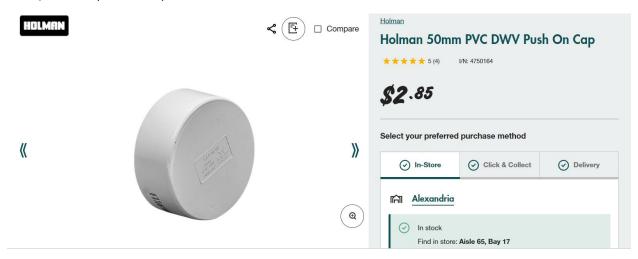

## 5) PVC glue

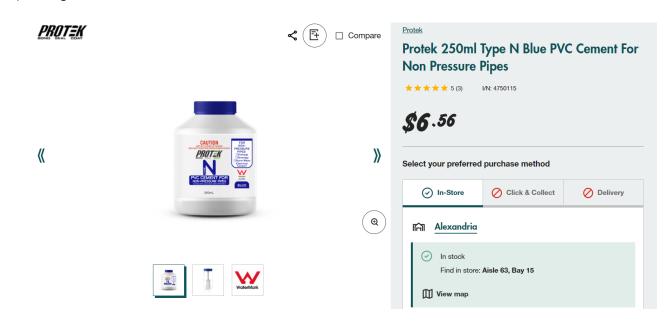

6) Tent pegs. 7mm\* 215mm. You may need longer if you are working in softer country eg sand

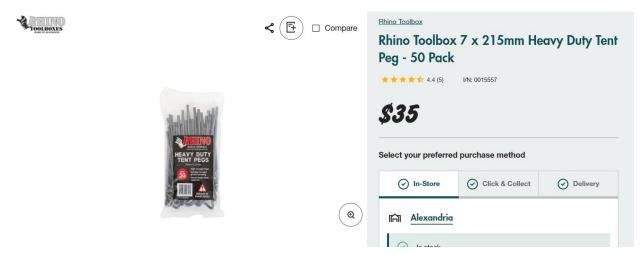

### Recipe

Once you have your pipe cut to 150mm lengths glue the non-vented end cap on. Push the vented cap on as far as it goes and drill a 10mm hole through as straight as you can get it making sure you position it to go through both the cap and through the end of the pipe. This is important as it is the peg that holds the cap on. Tip unless you get the hole drilled in exactly the same spot on each station caps will not be interchangeable between stations so keep them together.